



BEAUX-ARTS CLASSIC PRODUCTS

WWW.BEAUX-ARTSCCLASSICPRODUCTS.COM

INFO@BEAUX-ARTSCCLASSICPRODUCTS.COM

410-867-0790

How To Install Beaux-Arts Classic Products Magnetic Filter Grilles




Inspect existing filter grille to see if the door has fixed hinges or is removable. If fixed hinges, or old and beat up, replace with a new filter grille cradle.



Pry up latches, then open the door as far as possible to remove door. (You may be able to use your existing filter grille cradle. Try inserting the decorative grille to check fit.)



Remove the filter. Then use a power screwdriver to remove the old filter grille cradle. Attach the new filter grille cradle with four screws into pre-drilled holes.

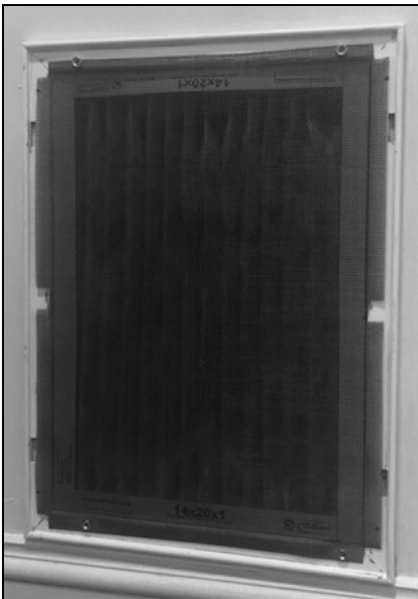

Insert clean filter into filter grille cradle. Cover filter with one piece of fiberglass mesh. Use magnets provided to hold the mesh in place. On ceilings just lay mesh on back of grille.



Next hold the grille by the edges and tilt the bottom into lower lip of the filter grille cradle. Then tilt the top in place. Magnets will hold grille on wall or ceiling



Adjust grille as necessary in frame. Save the second piece of black mesh for your next filter change. Wash dirty mesh with Hot water, put away for next change.

***Important Note for changing the filter.** Always use the edges of the frame to remove the grille from the cradle. Do not pull on the center decorative design to remove the grille from the cradle.