




Suspended Ceiling Grille Insert

Arts & Crafts Style Grille: RR-209 SGI-2x2 FR^[Flame Retardant]



*Especially Made for
2ft x 2ft Suspended Ceiling
Grid Insert.*

23-5/8"

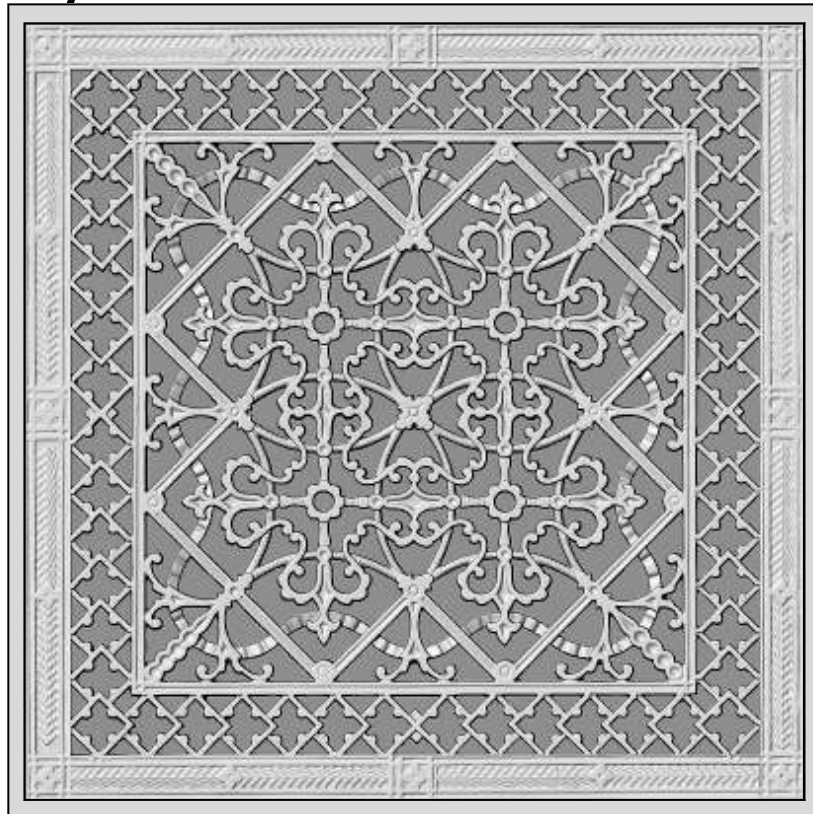

23-5/8"

4/10"

<i>part number</i>	RR-209 SGI 2x2 FR	<i>2x2 suspended ceiling</i>	2ft x 2ft	<i>finishes available</i>	13
<i>UPC Code</i>	738759723665	<i>outside height</i>	23-5/8"	<i>weight / dimensional weight</i>	7.5b / 26lbs
<i>style</i>	Arts & Crafts, circa 1870's	<i>outside width</i>	23-5/8"	<i>thickness</i>	.4"
<i>material</i>	Fire Retardant Urethane	<i>inside height</i>	21"		
<i>function</i>	HVAC Grille	<i>inside width</i>	21"	<i>free air flow</i>	307.2sq inch
<i>placement</i>	Suspended Ceiling	<i>frame width</i>	1-5/16"	<i>price</i>	\$389

<i>Material Technical Overview</i>	<i>Tensile Strength</i>	<i>Flexural Strength</i>	<i>Underwriters Laboratories</i>	<i>Heat Deflection</i>	<i>Shore D Hardness</i>
Flame Retardant Urethane Resin	6,800 psi	6,500 psi	U.L. 94v1 Flame retardant	230 degrees F	70

TP-4016 is a U.L. 94v1 registered Flame Retardant Polyurethane. V-1 definition : Burning stops within 30 seconds on a vertical specimen; drips of particles allowed as long as they are not inflamed.